


SMG-822 Specification

SECIFICATIONS:

1. Power supply: 12v-24v DC
2. Frequency: 433.92Mhz
3. Codes: can work with any fixed/learning/rolling codes
4. 2 channel
5. Maximum storage: 400 codes

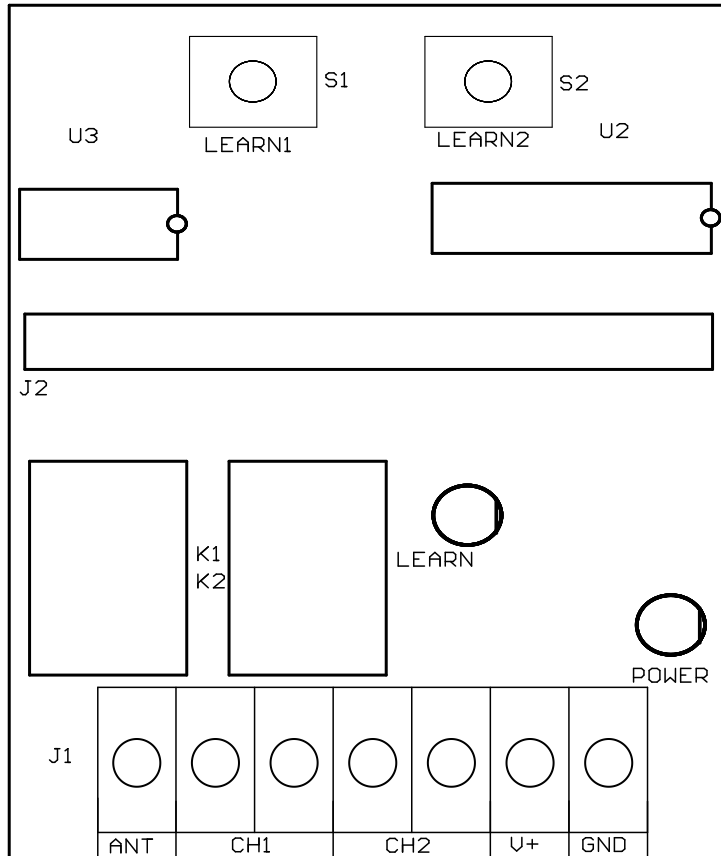

ANT	Receiver Antenna
CH1	Relay Output 1
CH2	Relay Output 2
V+	Voltage +
GND	Ground

PROGRAMMING:

1. Learning transmitter's codes:

Press "learn 1" or "learn 2" for 1 second, the "learn_led" light, then, press the button which you choose on the transmitter till the "learn_led" flash and go out, the transmitter's code has been stored.

- Repeat the above steps for other transmitters.

2. Erasing transmitter's codes:

Press "learn 1" or "learn2" and hold on to make the "learn_led light till go out, all codes of transmitters which had been stored are erased.